

Slant/Fin

HWT SERIES

INDIRECT FIRED WATER HEATERS



Delivers all the hot water that's needed - quickly and efficiently with long lasting performance built in. Designed and engineered for high performance at low cost.. with a warranty for long life.

- Supplies abundant hot water
- Saves energy and money
- Minimal heat loss
- Environmental and installer friendly
- Exterior steel jacket with powder coat paint
- Environmentally friendly polyurethane insulation limits heat loss and is both CFC and H-CFC free
- Carbon steel tank with oven glazed titanium glass liner for added strength and durability
- All models supplied with two magnesium anti-corrosion anodes
- Available in a range of convenient sizes and footprints
- State-of-the-art European Manufacturing

Slant/Fin


The next generation of hydronic heating



USGBC focuses on practices that increase a building's efficiency to harvest and use water, energy and materials.

HWT SERIES

INDIRECT FIRED WATER HEATERS

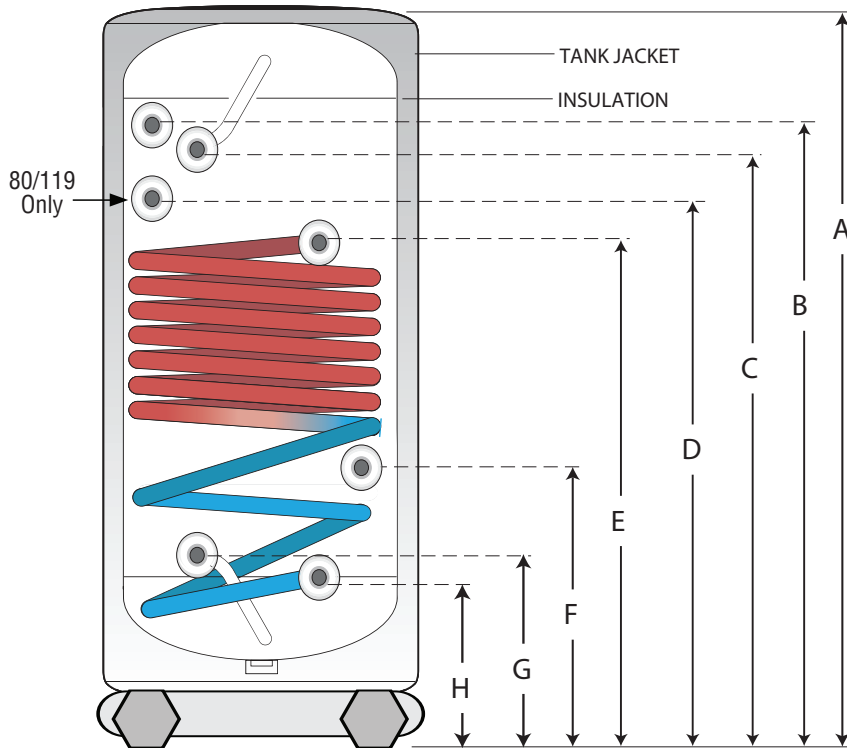

KEY	
A	TANK TOP
B	TEMP. & PRESS. RELIEF VALVE
C	DOMESTIC HOT WATER OUTLET
D	RECIRCULATION (HWT-80)
E	BOILER WATER INLET (SUPPLY)
F	CONTROL
G	DOMESTIC COLD WATER INLET
H	BOILER WATER OUTLET (RETURN)

PHYSICAL SPECIFICATIONS

MODEL	DIAMETER OF TANK	VOLUME (Gallons)	HEIGHT TO CONNECTION (Inches)								COIL SURFACE (Sq. Ft.)	WEIGHT (Lbs.)		
			A	B	C	D	E	F	G	H		NET	SHIPPING	FILLED
HWT-40	20"	40	45	37-1/4	35-5/8	N/A	35	20	10-7/16	8-7/8	14	116	124	449
HWT-60	20"	55	58	49-5/8	48	N/A	35	20	10-7/16	8-7/8	14	118	143	576
HWT-80	22"	79	71	61-1/2	61-1/4	47-7/8	54-5/8	40-1/4	10-7/8	10-1/4	26	232	243	737

CONNECTIONS

DESCRIPTION	MODEL		
	HWT-40	HWT-60	HWT-80
TEMP. & PRESS. RELIEF VALVE	3/4"	3/4"	1"
DOMESTIC HOT WATER OUTLET	3/4"	3/4"	1"
DOMESTIC COLD WATER INLET	3/4"	3/4"	1"
BOILER WATER OUTLET (RETURN)	1"	1"	1"
CONTROL	1/2"	1/2"	1/2"
BOILER WATER INLET (SUPPLY)	1"	1"	1"
RECIRCULATION (HWT-80)	—	—	3/4"

NOTES: All fittings are female NPT thread connections.